




One Email Handle it all

Better Reels, Better Solutions



sales@linttop.com



LINTTOP


Wire & Cable Solution

- 1. Serious raw material inspection
- 2. Curly edge for increased strength
- 3. Drum reinforcement optional
- 4. Indicated for metallic wires and cables
- 5. High rigidity, high precision
- 6. Consistent quality and reliability

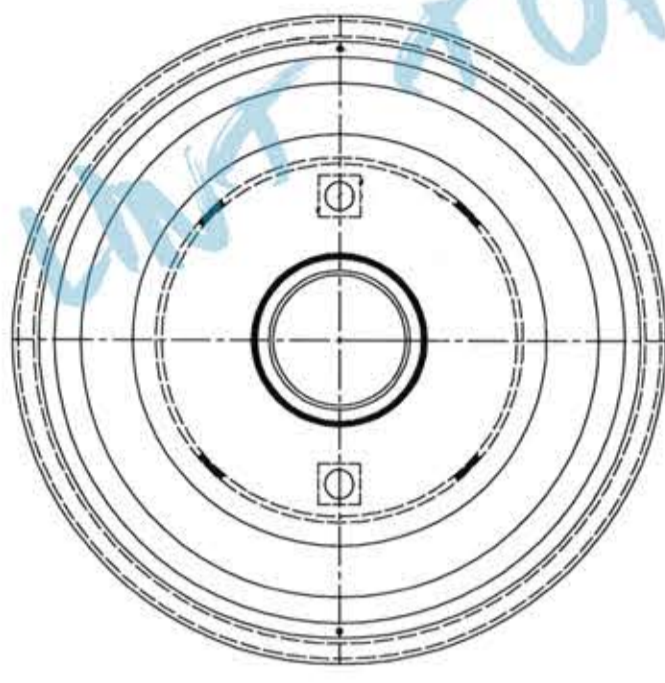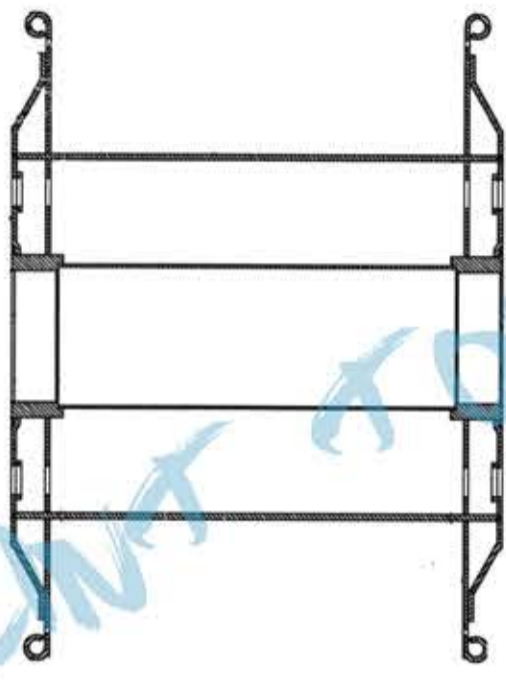

| Type | Specification | d1 | d2 | d3 | d4 | l1 | l2 | d5 | e |
|------|---------------|------|-----------------|-----|---------|-----|-----|----|-----|
| 315 | | 315 | 180/200/224 | 158 | 125/127 | 236 | 200 | 16 | 100 |
| 355 | | 355 | 200/224/250 | 158 | 125/127 | 265 | 224 | 16 | 100 |
| 400 | | 400 | 224/250/280 | 158 | 125/127 | 300 | 250 | 28 | 100 |
| 450 | | 450 | 250/280/315 | 158 | 125/127 | 335 | 280 | 28 | 100 |
| 500 | | 500 | 280/315/355 | 158 | 125/127 | 375 | 315 | 28 | 100 |
| 560 | | 560 | 315/355/400 | 158 | 125/127 | 425 | 355 | 28 | 100 |
| 630 | | 630 | 315/355/400/450 | 158 | 125/127 | 475 | 400 | 28 | 100 |
| 710 | | 710 | 400/450/500 | 297 | 250 | 530 | 450 | 40 | 170 |
| 800 | | 800 | 450/500/560 | 297 | 250 | 600 | 500 | 40 | 170 |
| 1000 | | 1000 | 560/630/710 | 297 | 250 | 750 | 630 | 50 | 250 |
| 1250 | | 1250 | 710/800/900 | 297 | 250 | 950 | 800 | 50 | 250 |

d1 - Flange diameter d2 - Barrel diameter d3 - Boss diameter d4 - Bore diameter d5 - Drive pin diameter
l1 - Overall Width l2 - Traverse e - Drive radius




LINTTOP

Wire & Cable Solution



Our Solution

- ▶ **S**TABLE GUARANTEE
DYNAMIC BALANCE TESTED
STABLE OPERATION AT HIGH SPEED
- ▶ **S**TANDARD GUARANTEE
DIN STANDARDS: 46395/7 DIN
CUSTOMERS' SPECIFICATION
- ▶ **S**ERVICE GUARANTEE
QUALITY TRACE AFTER DELIVERY
SUSTAINABLE AND EFFICIENT REPLY

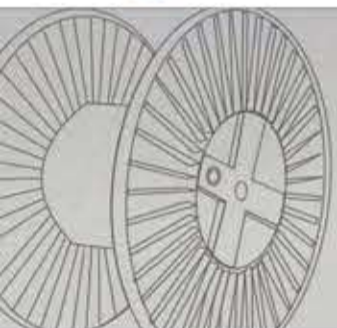

LINTTOP

Wire & Cable Solution

COLOUR CAN BE CUSTOMERIZED



FOR MORE INFO:

Visit www.linttop.com or Email sales@linttop.com

ADD.: Room 2406, Bldg A, Hengsheng Plaza,
West Jianguo Road, Xuzhou, 221006, P.R. China

Whatsapp: 008615162145573

ASHLEY YIN