

Metal Bobbins



1. Introduction


It is widely used in MV&LV cable, EHV cable, cross-linked power cable, optical fiber cable, steel wire and other fields, including all kinds of wire drawing, stranding, cabling, extruder and other machine reels, separable reinforced corrugated reel, delivery reel and other special purpose metal reels. It can be customized according to DIN, GB, etc. or drawings.

2. Technical Parameters



2.1 Double Layer High Speed Bobbin

1. Size range: PND315-1250
2. Dynamically balanced speed: 25-50m/s
3. It's used for drawing, stranding and bunching machines.

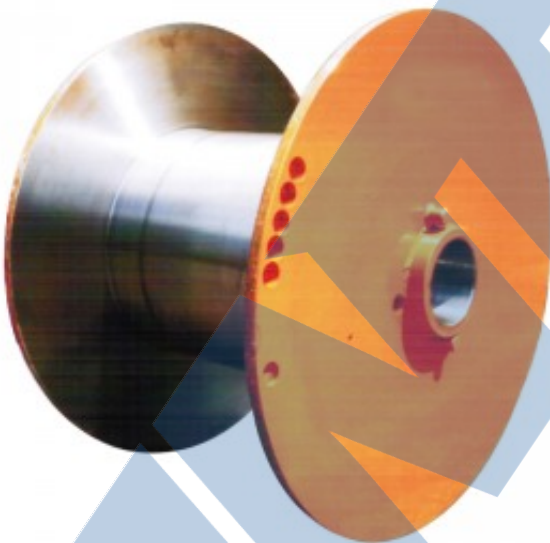


2.2 Flat High Speed Bobbin

1. Size range: PND100-800
2. Dynamically balanced speed: 25-50m/s
3. It's used for drawing, stranding and bunching machines.



2.3 Metal Flange Process Bobbin

1. Size range: PN100-1250
2. For process or shipping.

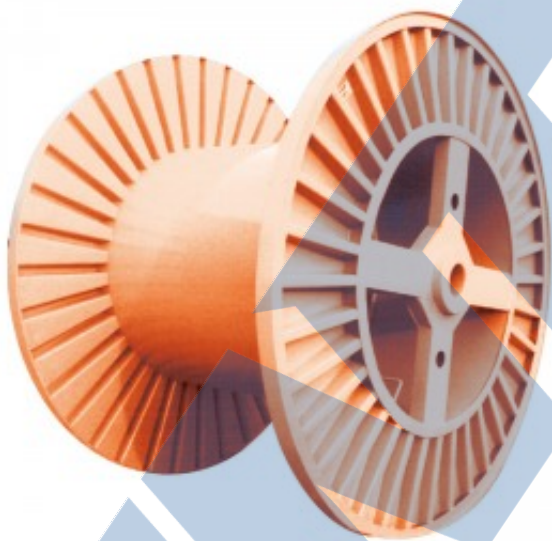

2.4 (Reinforced) Corrugated Bobbin

1. Size range: PN800-5000
2. For process or shipping.



2.5 Basket

- 1. Size range: 630mm-1000mm
- 2. Load capacity: Max. 5t

Product link : <https://www.linttop.com/metal-bobbins.html>